


Zebra scanner enclosures ATEX

Zebra FS40 / VS40 scanners / Smart cameras

The explosion-proof housings from Bout Solutions are compatible with Zebra FS40 / VS40 scanners / smart cameras

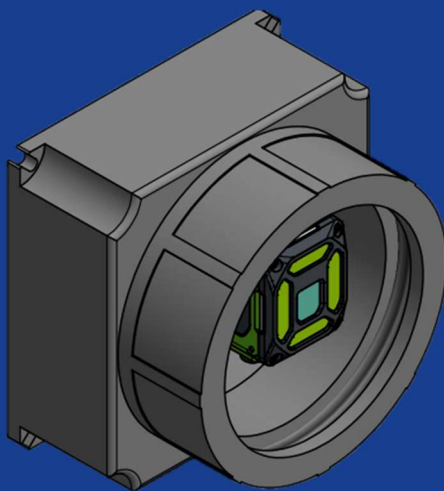

Material:	Corrosion and seawater resistant aluminum with polyurethane paint, RAL9002 (EMH90 = RAL6003) Protection IP65
Mounting plate:	Aluminum, 2mm thick (except EMH90)
Ground:	Internal and external bolt M6 in stainless steel
Ambient temperature:	-20°C - +40°C
Attachment:	Mounting eyes
Directive:	ATEX



Zone



0	✗	1	✓	2	✓
20	✗	21	✓	22	✓

On request

- Bores with or without cable gland
- Heating element 24v/25w
- Ambient temperature -30°C - +55°C

Classification

- II 2 G Ex d IIC T6/T5/T4 Gb
- II 2(1) G Ex d [ia Ga] IIC T6 Gb
- II 2(2) G Ex d [ib] IIC T6 Gb
- II 2 D Ex tb IIIC T85°C/T100°C/T135°C Db IP66



Optimize your warehouse operations

Learn more about “Boutsolutions” solutions

Boutsolutions: contact info@boutsolutions.nl

